

1 Energy Efficiency Options

Trend[®] Thermashield[®] in various glazing styles are available to help reduce energy consumption. Trend[®] Thermashield[®] means greater control, bigger savings and most importantly one less thing to worry about. Energy efficient options to u-value of 1.8 and SHGC 0.43 are available for Trend[®] Cedar Sliding Door.

2 Acoustic options

SoundMizer[®] acoustic solutions in various STC ratings, are available to STC 35 for Trend[®] Cedar Sliding Door. SoundMizer[®] acoustic solutions can reduce aircraft, highway traffic, railway and other annoying noise problems. For information or technical details contact Trend[®].

3 Locks

Sliding doors can be fitted with an optional double cylinder deadlock.

4 Safety Glazing

Toughened Safety A Grade Glass with a visual motif at the mid point to provide added safety. Laminated Glass is used in all non standard door sizes.

Double Glazing is available for energy efficiency requirements.

5 Heavy Duty Rollers

Trend[®] Cedar Sliding Door is fitted with heavy duty, double bogey nylon roller system that glide on aluminium tracks for smooth operation. .

6 Frames

Trend[®] Cedar Door frame is 150mm wide with the sash 110mm wide and 140 bottom rail.

Maximum Door Height is 2400mm.

Maximum Door Width is 5205mm (up to 6 panel door)

7 Interlockers

Protection from wind, rain and dust is provided by interlockers fitted to the door stile and mullion. These lock together when closed for additional security

8 Options

Colonial Bar, Federation Bar Layouts and Ovolo profiles are available.

ordering details

All doors are illustrated as viewed from the outside. Codes shown are for plain doors.

The first two numbers indicate approximate height. The last two numbers indicate approximate width.

For Colonial bar layout place CL at the end of the code. For Federation bay layout place FED at the end of the code. For Georgian Bar place /GB at end of code. CP indicates Cedar Sliding Door. L indicates single left hand opening. For right hand opening replace L with R. For Chair Rail place /CR at end of code.

150mm Frame Width without screens


205mm Frame Width with screens

Insect screens are also available

NOTE:

Trend® does not supply locking hardware on screen doors

stacker doors

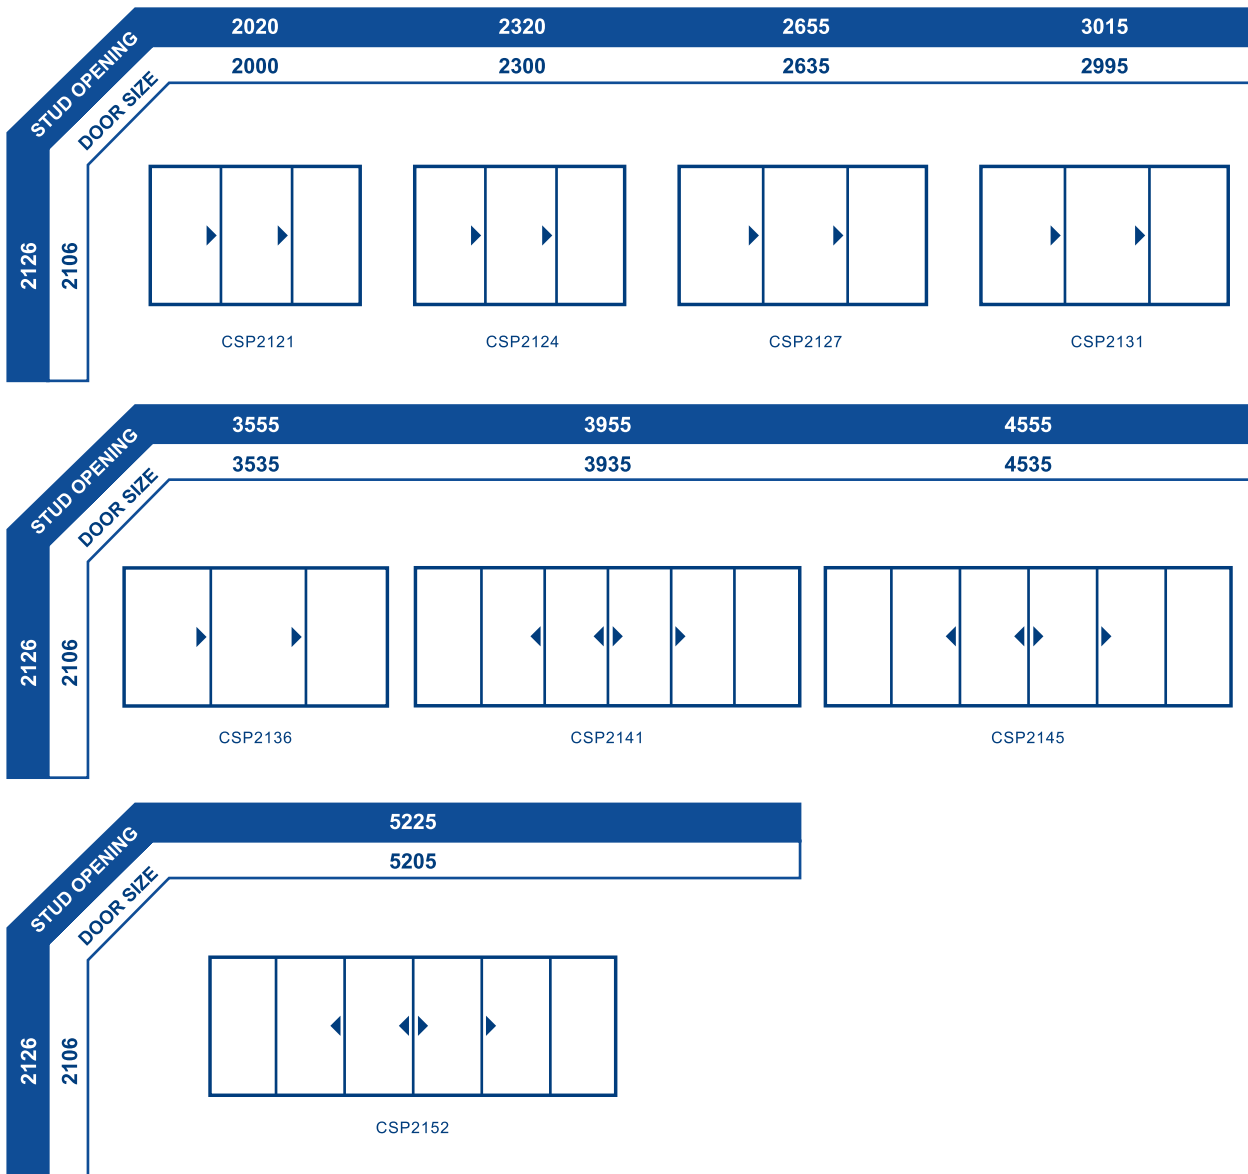

All windows and doors are designed to 700pa velocity and 150pa water rating. For higher ratings consult Trend® Windows & Doors.